
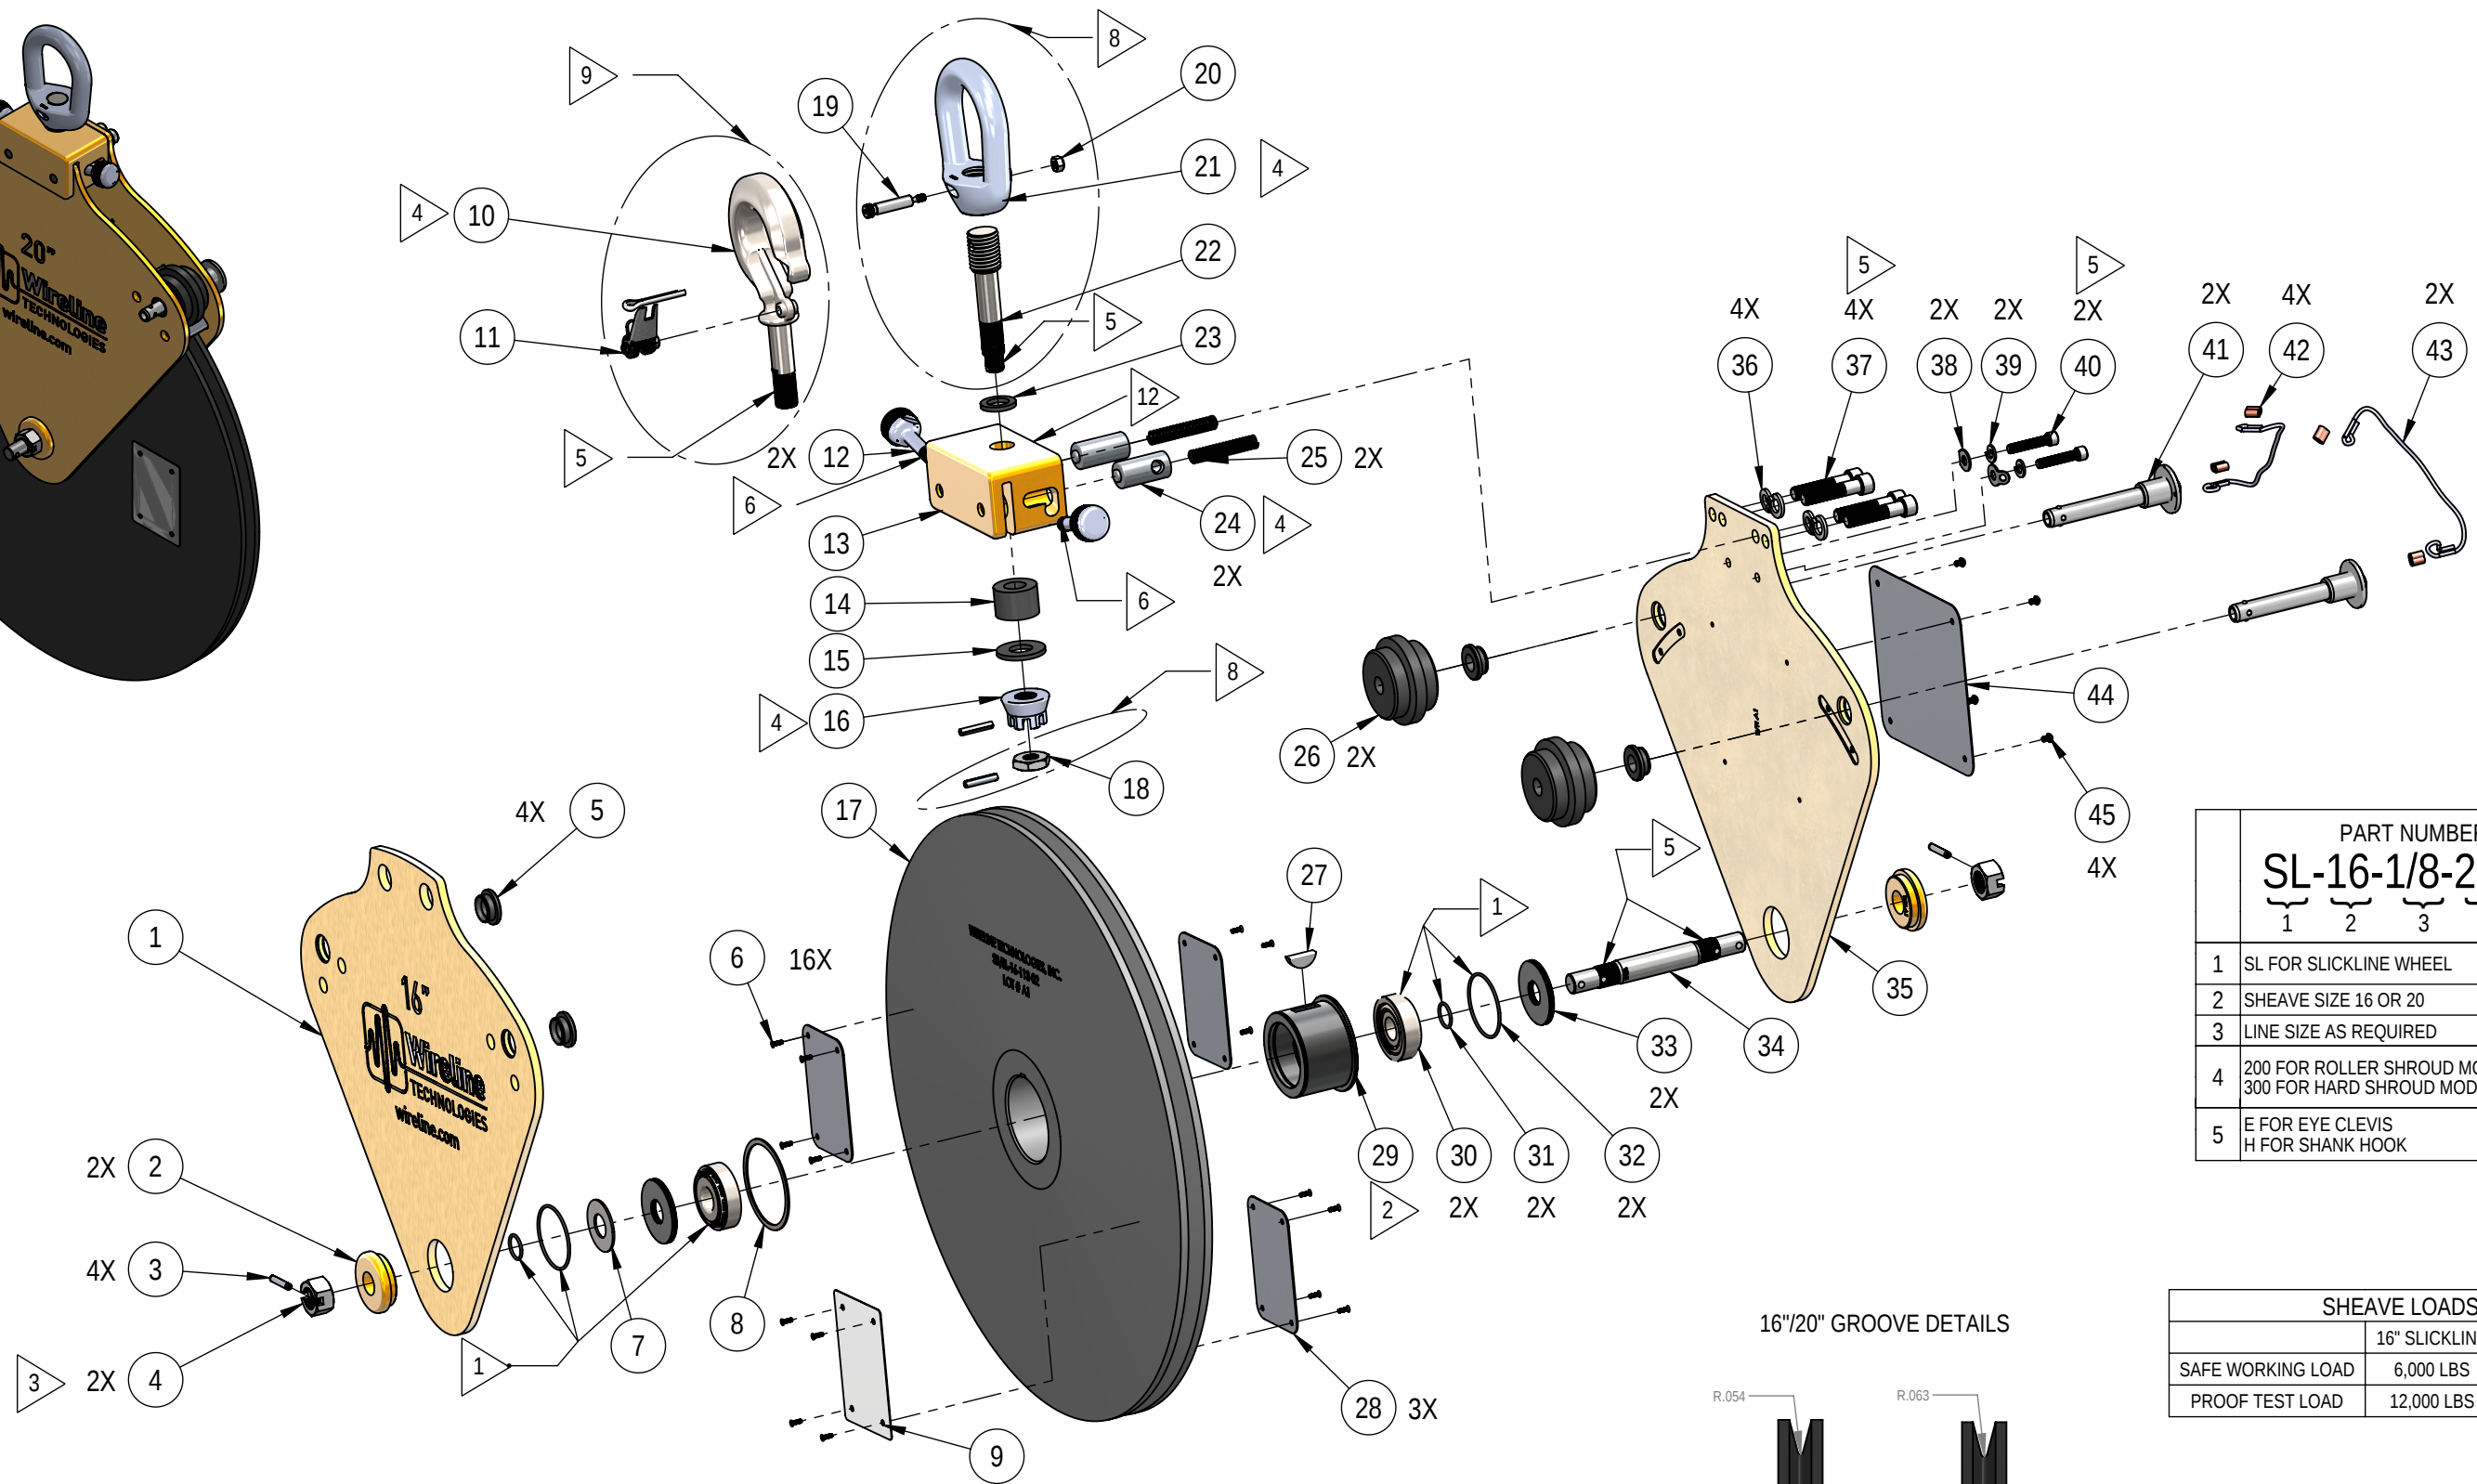


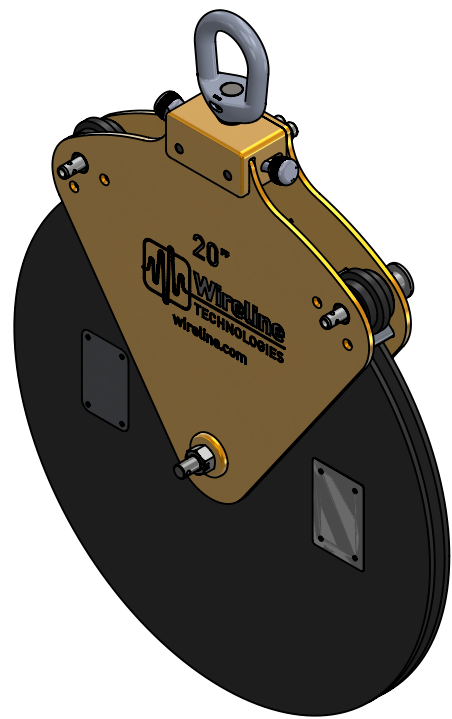

PART NUMBER:				
SL-16-1/8-200E				
1	2	3	4	5
1 SL FOR SLICKLINE WHEEL				
2 SHEAVE SIZE 16 OR 20				
3 LINE SIZE AS REQUIRED				
4 200 FOR ROLLER SHROUD MODEL 300 FOR HARD SHROUD MODEL				
5 E FOR EYE CLEVIS H FOR SHANK HOOK				

SHEAVE LOADS		
	16" SLICKLINE	20" SLICKLINE
SAFE WORKING LOAD	6,000 LBS	6,000 LBS
PROOF TEST LOAD	12,000 LBS	12,000 LBS

NOTES
▶ PREPACK ALL BEARINGS AND O-RINGS WITH POWERTAC HT EP2 GREASE (LBG-100).
▶ FILL CENTER OF HUB WITH POWERTAC HT EP2 GREASE (LBG-100).
▶ PRELOAD BEARINGS BY TIGHTENING TO 100 IN. LBS. THEN TO NEXT HOLE.
▶ LUBRICATE THESE PARTS W/ LIGHT MACHINE OIL.
▶ COAT THESE THREADS WITH ANTI-SIEZE LUBRICANT (RS-098).
▶ COAT THESE THREADS WITH LOCTITE 262 (LTS-100).
▶ COAT THESE THREADS WITH EPOXY (RS-097).
▶ PARTS FOR EYE CLEVIS OPTION.
▶ PARTS FOR SHANK HOOK OPTION.
▶ PROOF TEST THESE LOAD BEARING COMPONENTS, THEN INSPECT PER DOC. #WTI-129.
▶ TIGHTEN NUT MINIMUM NECESSARY TO FULLY EXPOSE HOLE IN SLOT.
▶ STAMP REAR PLATE HERE WITH ASSIGNED SERIAL NUMBER W/ 1/4" CHARACTERS.

CONFIDENTIALITY
THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF WIRELINE TECHNOLOGIES, INC. IT IS FURNISHED FOR YOUR INFORMATION ONLY AND MUST NOT BE MADE PUBLIC. IT MUST NOT BE COPIED AND MUST BE RETURNED ON DEMAND. MANUFACTURE OF PARTS PER THIS DRAWING IS EXPRESSLY FORBIDDEN EXCEPT BY WRITTEN AUTHORIZATION FROM WIRELINE TECHNOLOGIES, INC. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED AND PATENTS PENDING.

REVISIONS			
#	DESCRIPTION	INITIAL	DATE
4	ADD FLAG NOTE & FIX BOM	A.S.	23-APR-25
3	HANDLE, EXT CLEVIS SHAFT	A.S.	09-AUG-22
2	UPDATED FOR NEW HUB	DC	30-APR-14
1	ADDED INSPECTION LABEL	D.C.	01-DEC-09
NC			26-OCT-07

DRAWING APPROVAL			
DEPARTMENT	NAME	INITIAL	DATE
ENGINEERING	A. SURDI		
QUALITY	B. MACE		
MANUFACT.	M. DYSON		
PRODUCTION	A. DYSON		



2140 NORTH REDWOOD ROAD #60
SALT LAKE CITY, UT 84116

TEL. (801) 323 - 5533 FAX. (801) 323 - 7033

16" / 20" SLICKLINE SHEAVE ASSEMBLY

DWG #	SL-16/20-200	REV - 4
-------	--------------	---------

